

penstocks (uk) Ltd

Hydrostatic Bellmouth Valve

for flow control and isolation of water and sewage

Range from 150mm to 800mm nominal bore

Connection flanges to suit PN10, PN16, others on request

Materials of construction:

Static tube, control tube, bellmouth: stainless steel 304 or 316

Spindle: stainless steel 304 or 316

Pillar: stainless steel 304 or 316


Seals: NBR or EPDM

Spindle nut: bronze LG2

Fasteners: stainless steel A4

Operation

Hydrostatic bellmouth valves can be manually operated via a handwheel or by electric actuator

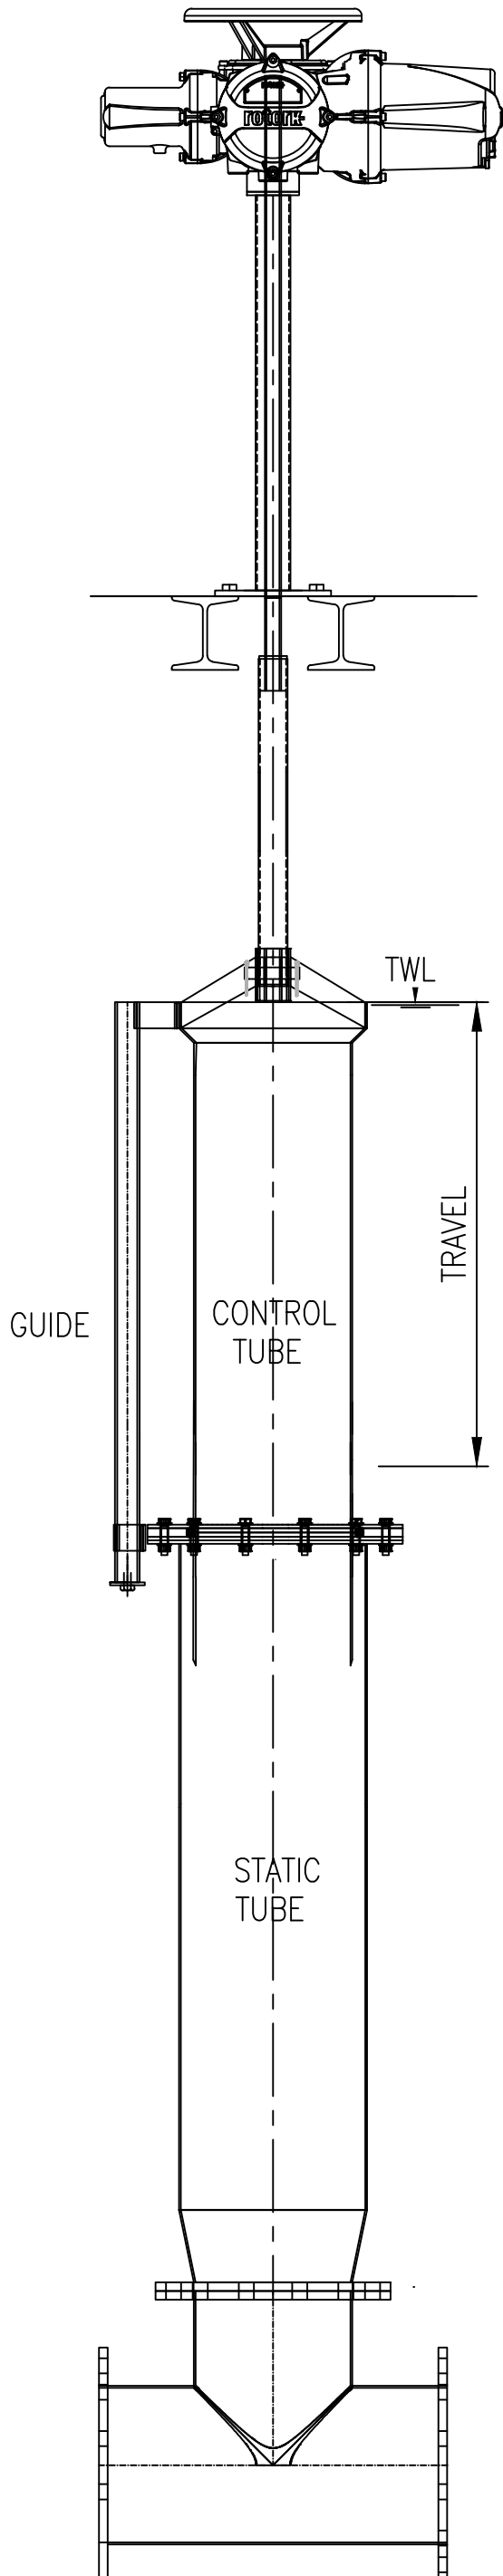

PENSTOCKS UK LTD
UNIT 6 ALAN BRAY CLOSE, HINCKLEY, LEICESTERSHIRE LE10 3BP
TEL +44 1455 636060 www.penstocksuk.com Email: sales@penstocksuk.com